4 Stall Standard Decontamination Trailer

Order TODAY!
609.301.7599
info@sandblastinc.com

Shower	4 Stalls
Trailer Size	24′ x 8′ enclosed trailer
Connections	2 5/16″ spring action 12k coupler with 10,000 lb. tounge jack
Construction	• ¾″ Advantek sub-flooring; seamless, non-slip • .040 thick, smooth aluminum exterior siding with white baked enamel finish; • R-11 insulation – floors, walls and ceiling; one air vent • heavy duty ACSI SIP aluminum framed doors with full length continuous hinge and door locks (30″ x 79″)
Climate Controls	5,600 BTU heating & 13,500 BTU cooling
Decon Equipment	700 CFM negative air unit with HEPA filtration
Materials Filtered	Micron filtration system for asbestos, and one lead filtration system with ½ HP pump
Lighting	Four (4) fluorescent light fixtures
Tank Capacity	80 gallon polyethylene holding tank mounted under
Water Supply	65 gallon electric water heater
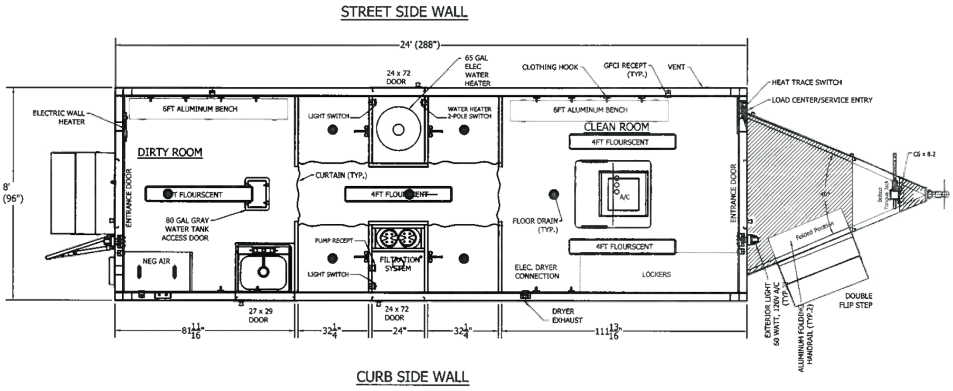
24′ DECONTAMINATION TRAILER
4-SHOWER